



HYD-226A





HYD-226B



No hole design

# HYD-226A/B




## LIGHT DISTRIBUTION CURVE

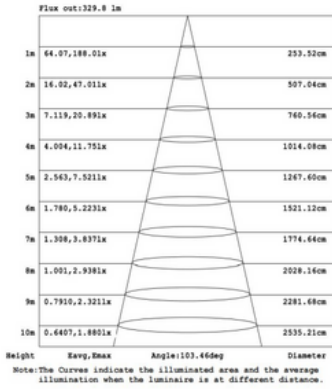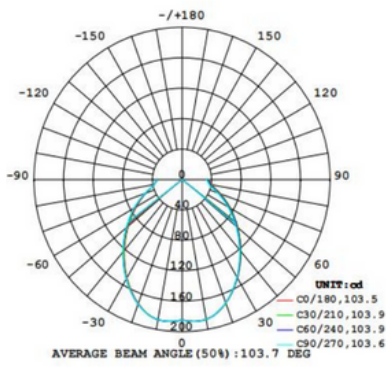

## FEATURES & BENEFIT

Materials of Optics	Glass
Materials of Housing	Aluminum
Certificates	CE(EMC) LVD RoHS CB
Mounting type	Recessed
Mounting location	Ceiling
Application environment	Indoor

## INSTALLATION & ACCESSORIES



## TECHNICAL DATA

Item No.	Power	Voltage	Color temperature	Luminous efficiency	Size
HYD-226A-12W	12W	220-240V	3000K/6500K	80-90 lm/w	80*100 mm
HYD-226B-12W	12W	220-240V	3000K/6500K	80-90 lm/w	80*110.5 mm

