


# HYD-A



### LIGHT DISTRIBUTION CURVE

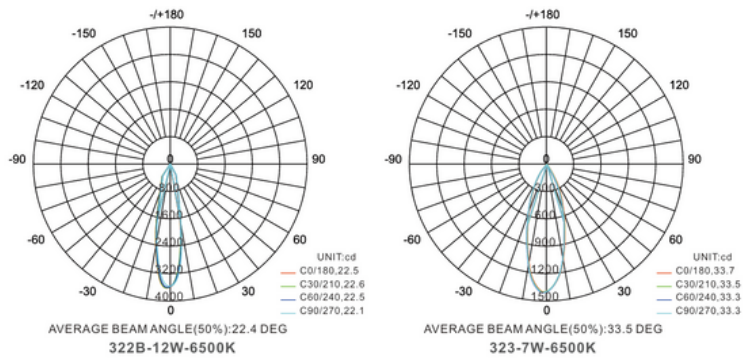


### FEATURES & BENEFIT

|                         |                            |
|-------------------------|----------------------------|
| Materials of Optics     | Anti Uv PC                 |
| Type of connection      | Screwless terminal         |
| Certificates            | CE(EMC) LVD RoHS CB        |
| Mounting type           | Twist into E27 lamp holder |
| Mounting location       | Ceiling                    |
| Application environment | Indoor                     |



### INSTALLATION & ACCESSORIES

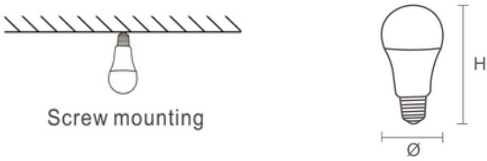

### TECHNICAL DATA

| Item No. | Power | Voltage  | Color temperature | Luminous efficacy | Size      |
|----------|-------|----------|-------------------|-------------------|-----------|
| HYD-A60  | 7W    | 220-240V | 3000K/4000K/6500K | 90-10 lm/w        | 60*112 mm |
| HYD-A65  | 9W    | 220-240V | 3000K/4000K/6500K | 90-10 lm/w        | 65*124 mm |
| HYD-A70  | 12W   | 220-240V | 3000K/4000K/6500K | 90-10 lm/w        | 70*138 mm |