




HYD-AT

LIGHT DISTRIBUTION CURVE

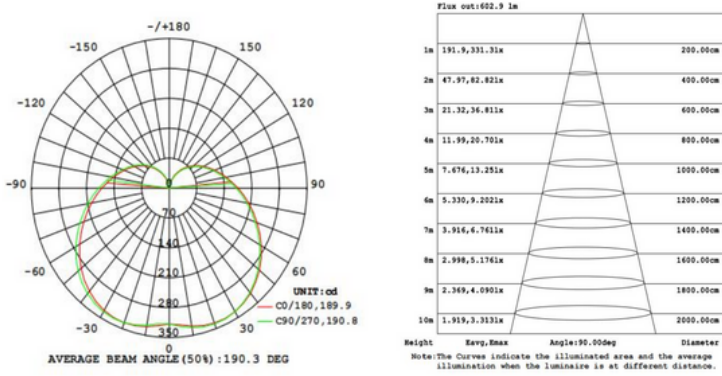


FEATURES & BENEFIT

Materials of Optics	Anti Uv PC
Type of connection	Screwless terminal
Certificates	CE(EMC) LVD RoHS CB
Mounting type	Twist into E27 lamp holder
Mounting location	Ceiling
Application environment	Indoor



INSTALLATION & ACCESSORIES

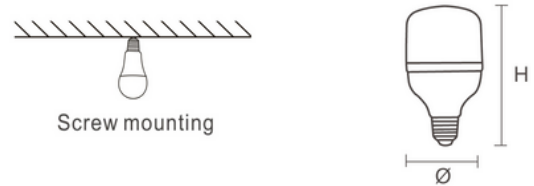

TECHNICAL DATA

Item No.	Power	Voltage	Color temperature	Luminous efficacy	Size
HYD-AT80	15W	220-240V	3000K/4000K/6500K	90-100 lm/w	80*139 mm
HYD-AT100	20W	220-240V	3000K/4000K/6500K	90-100 lm/w	100*165 mm
HYD-AT120	30W	220-240V	3000K/4000K/6500K	90-100 lm/w	120*195 mm
HYD-AT140	45W	220-240V	3000K/4000K/6500K	90-100 lm/w	140*218 mm