


HYD-L02E





IP65
Water and dust resistant

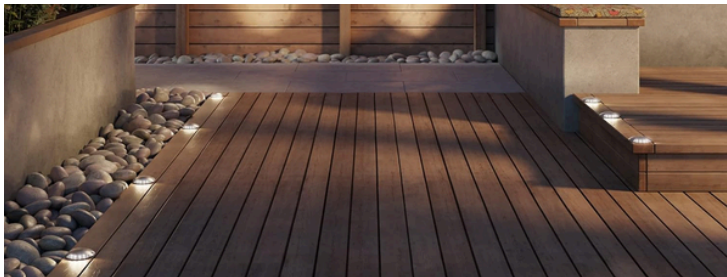

FEATURES & BENEFIT

Materials of Optics	Glass
Materials of Housing	Aluminum/PC
Certificates	CE(EMC) LVD RoHS CB
Mounting type	Put
Mounting location	Underground
Application environment	outdoor
IP Rating	IP65

INSTALLATION & ACCESSORIES



TECHNICAL DATA

Item No.	Power	Voltage	Color temperature	Luminous efficiency	Size
HYD-L02E2-T1	1W	220-240V	3000K	20 lm/w	47*80 mm
HYD-L02E1-T2	1W	220-240V	3000K	20 lm/w	47*80 mm
HYD-L02E2-T2	1W	220-240V	3000K	20 lm/w	56*86 mm
HYD-L02E1-T4	1W	220-240V	3000K	20 lm/w	47*80 mm
HYD-L02E2-T4	1W	220-240V	3000K	20 lm/w	56*86 mm