



HYD-L06



Large irradiation range


LIGHT DISTRIBUTION CURVE

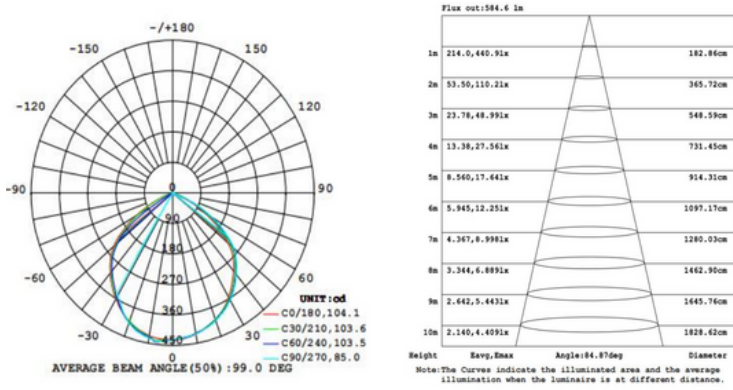

FEATURES & BENEFIT

Materials of Optics	Glass
Materials of Housing	Aluminum
Certificates	CE(EMC) LVD RoHS CB
Mounting type	Surface mounted
Mounting location	Ground/Lawn
Application environment	Outdoor
IP Rating	IP65

INSTALLATION & ACCESSORIES

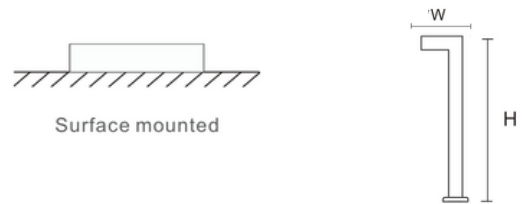

TECHNICAL DATA

Item No.	Power	Voltage	Color temperature	Luminous efficiency	Size
HYD-L06-10W	10W	220-240V	3000K	80-90 lm/w	150*50*100*600 mm

