


HYD-L04-C7



Large irradiation range



LIGHT DISTRIBUTION CURVE

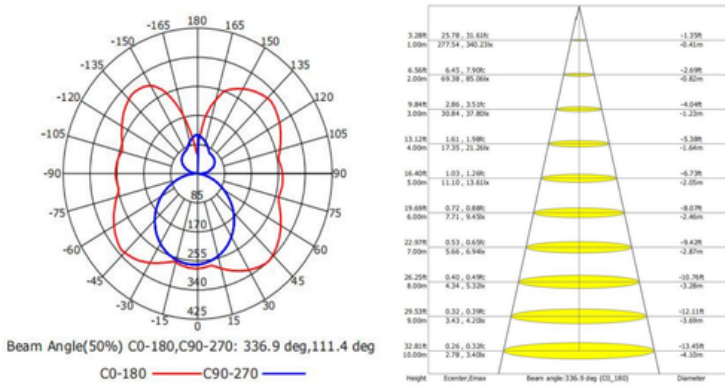

FEATURES & BENEFIT

Materials of Optics	PC
Materials of Housing	Aluminum
Certificates	CE(EMC) LVD RoHS CB
Mounting type	Surface mounted
Mounting location	Ground/Lawn
Application environment	Outdoor
IP Rating	IP65

INSTALLATION & ACCESSORIES



TECHNICAL DATA

Item No.	Power	Voltage	Color temperature	Luminous efficiency	Size
HYD-L04-C7	50W	220-240V	3000K	80-90 lm/w	150*150*2500 mm

