




HYD-ST-056/57/58

LIGHT DISTRIBUTION CURVE

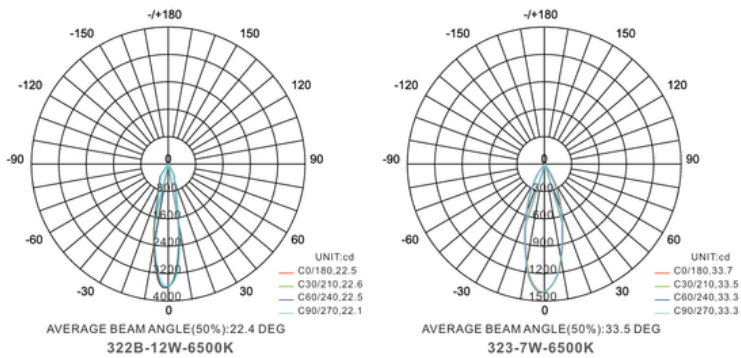

FEATURES & BENEFIT

Materials of Optics	Anti Uv PC
Type of connection	Screwless terminal
Certificates	CE(EMC) LVD RoHS CB
LEDs/M	120
Cut length	10cm/cut
Roll size	50m
CRI	Ra80
Mounting location	Ceiling/wall
Application environment	Indoor/Outdoor
IP Rating	IP65

TECHNICAL DATA

Item No.	Power	Voltage	Color temperature	Luminous efficieny	Size
HYD-ST-056	9.5W/m	220-240V	3000K/4000K	45-50 lm/w	16mm*16mm*50m
HYD-ST-057	9.5W/m	220-240V	3000K/4000K	45-50 lm/w	12mm*12mm*50m
HYD-ST-058	9.5W/m	220-240V	3000K/4000K	45-50 lm/w	10mm*10mm*50 m