

# Orvix

# LV-815

## RECESSED DOWNLIGHT




### FEATURES & BENEFIT

Materials of Optics	Anti Uv PC
Materials of Housing	Aluminum
LED Chip	EPISTAR
Driver	TRIDONIC
Mounting type	Recessed
Mounting location	Ceiling
Application environment	Indoor
IP Rating	IP20
Warranty	5 years

EPISTAR TRIDONIC

### INSTALLATION & ACCESSORIES

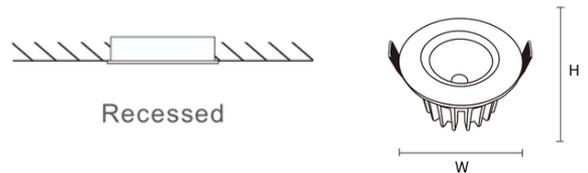

### TECHNICAL DATA

Item No.	Power	Voltage	Beam angle	Color temperature	Luminous efficiency	Size	Cut-Out
LV-815-A	7W	220-240V	38°	3000K/4000K	100 lm/w	85x57 mm	75 mm
LV-815-B	12W	220-240V	38°	3000K/4000K	100 lm/w	97x71 mm	85 mm
LV-815-C	20W	220-240V	38°	3000K/4000K	100 lm/w	130x88 mm	120 mm
LV-815-D	30W	220-240V	38°	3000K/4000K	100 lm/w	158x95 mm	150 mm

