



HYD-ST-052

LIGHT DISTRIBUTION CURVE

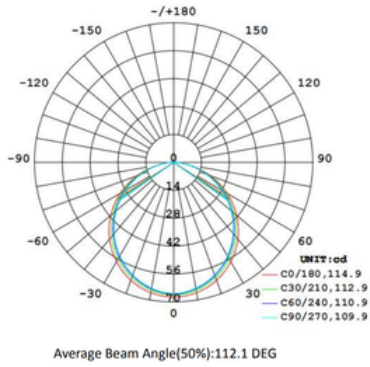

FEATURES & BENEFIT

Materials of Optics	Anti Uv PC
Type of connection	Screwless terminal
Certificates	CE(EMC) LVD RoHS CB
Mounting location	Wall/Floor
Application environment	Outdoor
Operating Temp.	-20 - 45°C
IP Rating	IP67

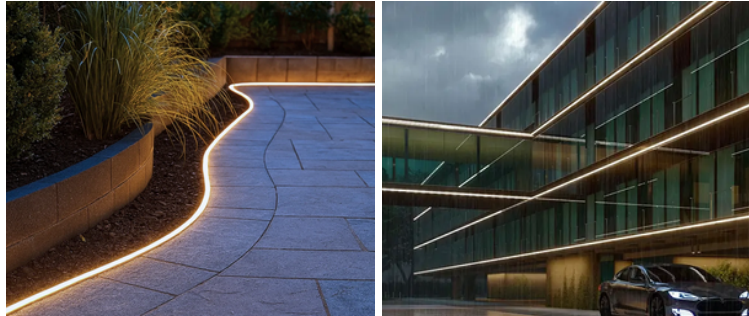

Clips & Alum. Carrier:L20*W19*H18mm

Mono-color

IP67

LM-80
TESTED

cRU US
E481425

CE


3
Warranty

TECHNICAL DATA

Item No.	Power	Voltage	Color temperature	Luminous efficiency	Size
HYD-ST-052	12W/M	24V	4000K	630 lm/M	10M/Roll

INSTALLATION OPTIONS

Waterproof Connector:



Top Bending
R>150mm



Mold able Carrier