


## FLS-20-500 DALI-2 LD PRO

### PRODUCT DESCRIPTION

- For luminaire of protection class I and class II
- Isolated / SELV / Built in / Independent (With side caps)
- Input Voltage 220-240 VAC
- Protection: SCP/ OLP/ OVP/ OTP
- DALI dimming, Push Dimming, Corridor mode
- DALI-2 Parts 251, 252 and 253
- Dimming range 1% to 100%
- Output current adjusted via dip-switch
- Efficiency > 87% ; Power Factor > 0.95
- Suitable for emergency lighting acc. to EN 50172

### TECHNICAL DATA

Item No.	Power	Input Voltage	Output Current	Output Voltage	Size (L*W*H)
FLS-20-500 DALI-2 LD PRO	20W	220-240V	80-500mA	2.5-49V	88*40*22 mm

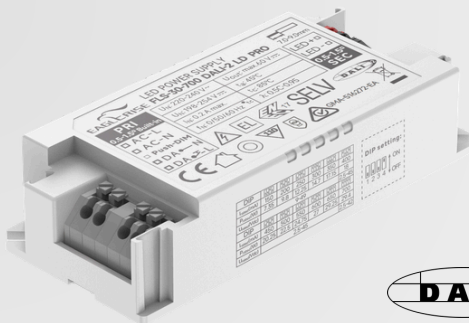


## FLS-30-700 DALI-2 LD PRO

### PRODUCT DESCRIPTION

- For luminaire of protection class I and class II
- Isolated / SELV / Built in / Independent (With side caps)
- Input Voltage 220-240 VAC
- Protection: SCP/ OLP/ OVP/ OTP
- DALI dimming, Push Dimming, Corridor mode
- DALI-2 Parts 251, 252 and 253
- Dimming range 1% to 100%
- Output current adjusted via dip-switch
- Efficiency > 90% ; Power Factor > 0.95
- Suitable for emergency lighting acc. to EN 50172

### TECHNICAL DATA

Item No.	Power	Input Voltage	Output Current	Output Voltage	Size (L*W*H)
FLS-30-700 DALI-2 LD PRO	30W	220-240V	150-700mA	2.5-49V	98*43*22mm

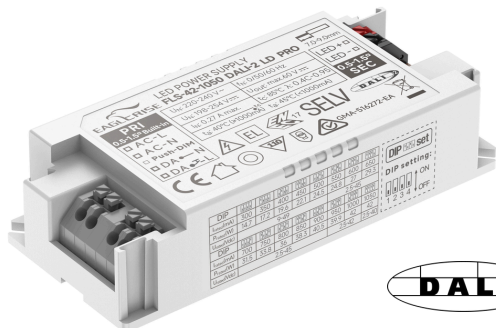

## FLS-42-1050 DALI-2 LD PRO

### PRODUCT DESCRIPTION

- For luminaire of protection class I and class II
- Isolated / SELV / Built in / Independent (With side caps)
- Input Voltage 220-240 VAC
- Protection: SCP/ OLP/ OVP/ OTP
- DALI dimming, Push Dimming, Corridor mode
- DALI-2 Parts 251, 252 and 253
- Dimming range 1% to 100%
- Output current adjusted via dip-switch
- Efficiency > 90% ; Power Factor > 0.95
- Suitable for emergency lighting acc. to EN 50172

### TECHNICAL DATA

Item No.	Power	Input Voltage	Output Current	Output Voltage	Size (L*W*H)
FLS-20-500 DALI-2 LD PRO	20W	220-240V	80-500mA	2.5-49V	88*40*22 mm