


FLS-60-1500 DALI-2 LD1

PRODUCT DESCRIPTION

- For luminaire of protection class I and class II
- Isolated / SELV / Built in / Independent (With side caps)
- Input Voltage 220-240 VAC
- Protection: SCP/ OLP/ OVP/ OTP
- DALI dimming, Push Dimming, Corridor mode
- DALI-2 Parts 251, 252 and 253
- Dimming range 1% to 100%
- Output current adjusted via dip-switch
- Efficiency>90% ; Power Factor>0.95
- Suitable for emergency lighting acc. to EN 50172

TECHNICAL DATA

Item No.	Power	Input Voltage	Output Current	Output Voltage	Size (L*W*H)
FLS-60-1500 DALI-2 LD1	60W	220-240V	900-1500mA	2.5-49V	113*43*25 mm

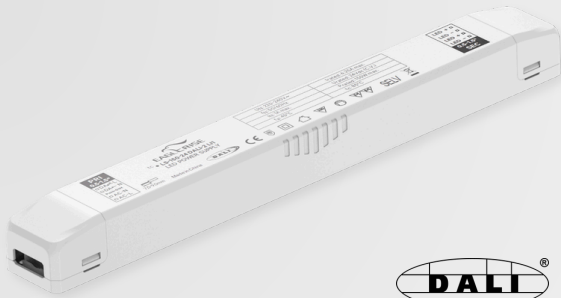

LS-150-24 DALI-2 LI1

PRODUCT DESCRIPTION

- For luminaire of protection class I and class II
- Isolated / SELV / Built in / Independent
- Input Voltage 220-240 VAC
- Protection: SCP/ OLP/ OVP/ OTP
- DALI dimming, Push Dimming, Corridor mode
- DALI-2 Parts 251, 252 and 253
- Dimming range 1% to 100%
- Efficiency>91%
- Power Factor>0.95

TECHNICAL DATA

Item No.	Power	Input Voltage	Output Current	Output Voltage	Size (L*W*H)
LS-150-24 DALI-2 LI1	150W	220-240V	0-6.25A	24V	318*38*30 mm



HYD-VTS-100-24 IP67 L

PRODUCT DESCRIPTION

- High efficiency up to 86%
- Built-in active PFC function
- All-Around Protection: OLP,SCP,OTP
- Compact plastic Case, Free Air Convection
- Waterproof(IP67) and UL Dry/Damp/Wet Location
- Input Surge Protection:2kV line-line
- High Reliability & Long Lifetime

TECHNICAL DATA

Item No.	Power	Input Voltage	Output Current	Output Voltage	Size (L*W*H)
HYD-VTS-100-24 IP67 L	24W	220-240VAC	0-1A	24V	118*35*26mm