




HYD-60-24 LI EXC

PRODUCT DESCRIPTION

- For luminaires of protection ClassII, SELV, Independent
- Input Voltage 220-240VAC
- Protections: SCP/OLP/OVP/OTP
- Power Factor: ≥ 0.95 (Typ.)
- Efficiency: $\geq 88\%$ (Typ.)

TECHNICAL DATA

Item No.	Power	Input Voltage	Output Current	Output Voltage	Size (L*W*H)
HYD-60-24 LI EXC	60W	220-240V	0-2.5A	24V	113*43*25 mm

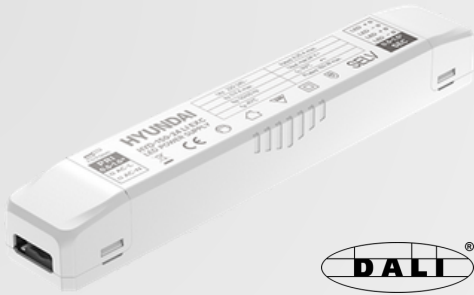

HYD-150-24 DALI-2 LI

PRODUCT DESCRIPTION

- For luminaire of protection class I and class II
- Isolated / SELV / Built in / Independent
- Input Voltage 220-240 VAC
- Protection: SCP/ OLP/ OVP/ OTP
- DALI dimming, Push Dimming, Corridor mode
- DALI-2 Parts 251, 252 and 253
- Dimming range 1% to 100%
- Efficiency>91%
- Power Factor>0.95

TECHNICAL DATA

Item No.	Power	Input Voltage	Output Current	Output Voltage	Size (L*W*H)
HYD-150-24 DALI-2 LI	150W	220-240V	0-6.25A	24V	318*38*30 mm



HYD-75-24 LI EXC

PRODUCT DESCRIPTION

- Class II, SELV, Independent
- Input Voltage 220-240VAC
- Protections: SCP/OLP/OVP/OTP
- Power Factor: ≥ 0.95 (Typ.)
- Efficiency: $\geq 88\%$ @12V; $\geq 89\%$ @24V(Typ.)

TECHNICAL DATA

Item No.	Power	Input Voltage	Output Current	Output Voltage	Size (L*W*H)
HYD-75-24 LI EXC	75W	220-240VAC	0-3.13A	24V	168*38*30mm