

MTS-FL69112/24

MAGNETIC TRACK LIGHT

PRODUCT DETAILS

| | |
|-------------------------|-------------------|
| Materials of Optics | PMMA |
| Materials of Housing | Die-cast aluminum |
| Driver | DALI |
| Dimmable | Yes |
| Mounting type | Track mounted |
| Mounting location | Ceiling/wall |
| Application environment | Indoor |
| IP Rating | IP20 |
| Warranty | 3 years |



Dimming & Control: Integrated DALI driver, fully compatible with DALI systems.


Precision Control: Smooth, flicker-free dimming from 0.1% to 100% via DALI-2 protocol.

Tunable White: Adjustable CCT from 2700K to 6500K for human-centric lighting.



Individual Addressing: Supports independent control, grouping, and scene setting for every fixture.

Standard Compliance: Fully compatible with IEC 62386 and major DALI control systems.

INSTALLATION & ACCESSORIES



Track mounted

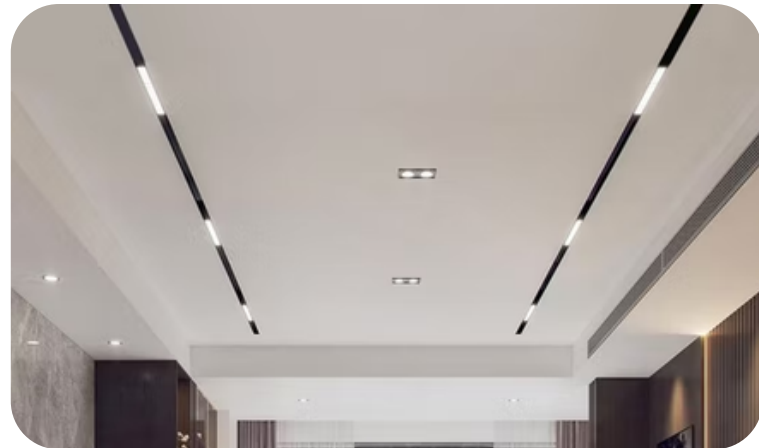

TECHNICAL DATA

| Item No. | Power | Voltage | Color temperature | Luminous efficiency | Size |
|-------------|-------|---------|-------------------|---------------------|-------------|
| MTS-FL69112 | 12w | 48V | 2700-6500K | 80lm/w | 23*45*300mm |
| MTS-FL69124 | 24w | 48V | 2700-6500K | 80lm/w | 23*45*600mm |