

MTS-TR69315/18/30

MAGNETIC TRACK LIGHT

PRODUCT DETAILS

Materials of Optics	PMMA
Materials of Housing	Die-cast aluminum
Driver	DALI
Dimmable	Yes
Mounting type	Track mounted
Mounting location	Ceiling/wall
Application environment	Indoor
IP Rating	IP20
Warranty	3 years



Dimming & Control: Integrated DALI driver, fully compatible with DALI systems.


Precision Control: Smooth, flicker-free dimming from 0.1% to 100% via DALI-2 protocol.

Tunable White: Adjustable CCT from 2700K to 6500K for human-centric lighting.

Individual Addressing: Supports independent control, grouping, and scene setting for every fixture.

Standard Compliance: Fully compatible with IEC 62386 and major DALI control systems.

INSTALLATION & ACCESSORIES

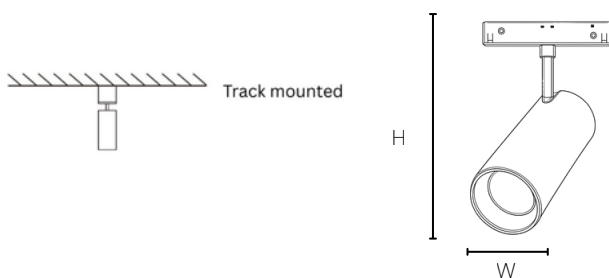

TECHNICAL DATA

Item No.	Power	Voltage	Color temperature	Luminous efficiency	Size
MTS-TR69315	15w	48V	2700-6500K	80lm/w	45*100mm
MTS-TR69318	18w	48V	2700-6500K	80lm/w	55*120mm
MTS-TR69330	30w	48V	2700-6500K	80lm/w	65*140mm