

Solaro

HB-913

HIGHBAY LIGHT




FEATURES & BENEFIT

Materials of Optics	Anti Uv PC
Materials of Housing	Aluminum
LED Chip	BRIDGELUX
Driver	LIFUD
Mounting type	Suspension
Mounting location	Inground/Wall/Ceiling
Application environment	Indoor/Outdoor
IP Rating	IP66
Warranty	5 years



INSTALLATION & ACCESSORIES

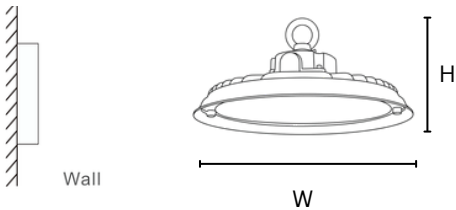

TECHNICAL DATA

Item No.	Power	Voltage	Beam angle	CRI	Color temperature	Luminous efficiency	Size
HB-913	180W/250W	220-240V	105°	>80	3000K/4000K/6000K	140 lm/w	358x165 mm

